


12" FIRE RESISTANT LETTERPLATE

For 20-40mm and 40-80mm Door Profiles

The UAP Anti Vandal 250mm 10 inch letterplate comes with both an external and internal flap to protect your customer's homes, and is available in 2 different depths (20-40mm for uPVC doors, and 40-80mm for composite and wooden doors).

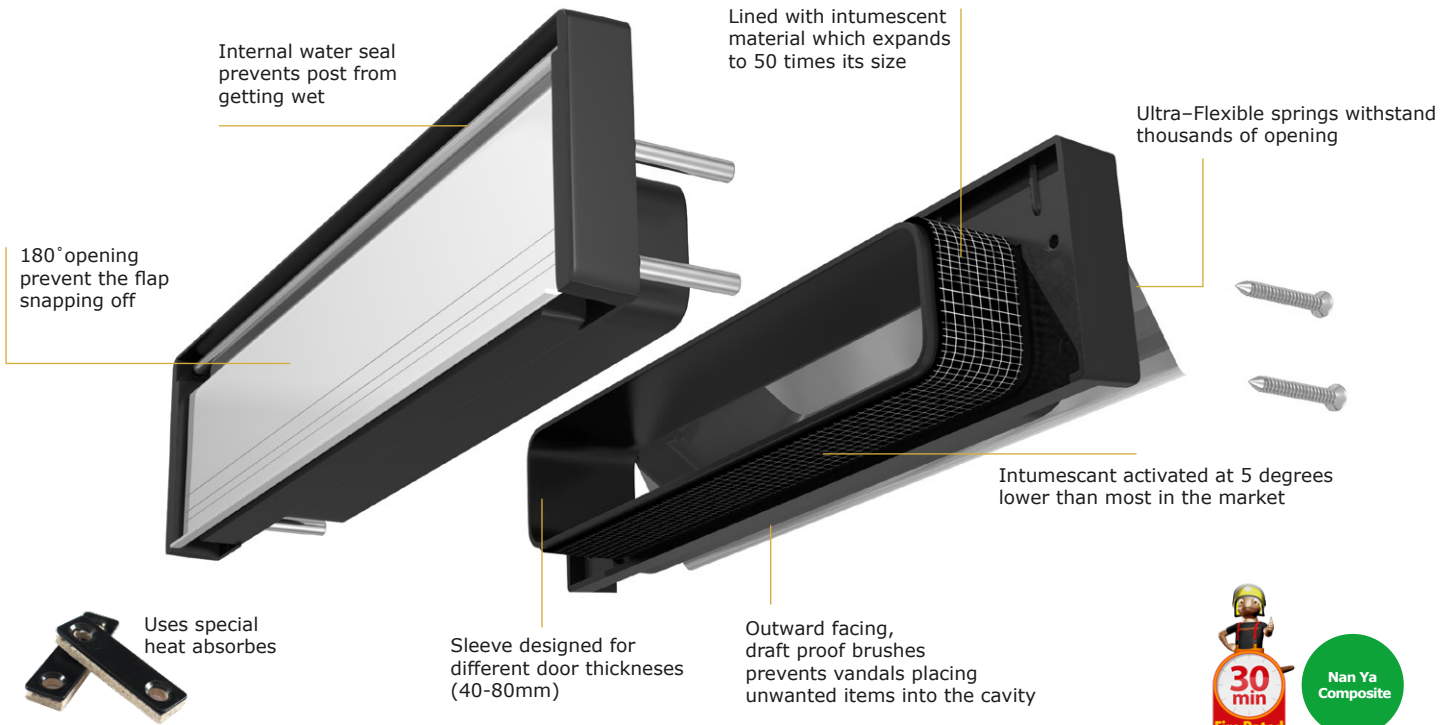

ANTI SNAP FLAP



ANTI VANDAL



ANTI BURGLAR



Nan Ya Composite



Timber

Features Include:

30 minutes Nan Ya Composite doors and 60 minutes Timber doors fire rated

Lined with special intumescent material which expands to 50 times

Uses special heat absorbers to stop hot screws melting the plastic

Intumescent activated at 5 degrees lower than most in the market

Outward facing brushes create the Anti-Vandal feature as it prevents vandals from placing unwanted items into the cavity

Blind bolts to the exterior of the letterplate prevents the outer frame being unscrewed from the door externally

Designed for 40-80mm thick composite and wooden doors

An internal water seal prevents water getting into the door or panel, and stops letters getting wet

Ultra-flexible springs can withstand the letterbox flap opening thousands of times without breaking

Revolutionary Patent pending self-aligning screw boss makes screwing the inner and outer frames together easy

Conforms to many standards and testing requirements including BS EN 1303:2005


Salamander® Framemaster Firecheck

Finishes	40-80 Door Opening	Plastic Frame Colour	Flap Material Construction	Coating Guarantee
Gold Anodised	FMB1248G-FR	Black	Aluminium	5 Years Inland
Silver Anodised	FMB1248SA-FR	Black	Aluminium	5 Years Inland
Black Powder Coat	FMB1248W-FR	Black	Aluminium	5 Years Inland
White Powder Coat	FMB1248B-FR	Black	Aluminium	5 Years Inland
PVD Gold	FMB1248PVDG-FR-NANOCAST	Black	Stainless Steel	LIFETIME
Mirror Polished	FMB1248MPSS-FR-NANOCAST	Black	Stainless Steel	LIFETIME
Satin Stainless	FMB1248SSS-FR-NANOCAST	Black	Stainless Steel	LIFETIME



Measurements

Distance Between Screw Holes	280mm
Letterplate Length	300mm
Letterplate Height	65mm
Frame Material	Plastic
Cavity Hole Size	250mm x 39.75mm




All Aluminium Letterplates

Finishes	40-80 Door Opening	Flap Material Construction	Coating Guarantee
Gold Anodised	FMG1248G-FR	Aluminium	10 Years Colour Fast
Silver Anodised	FMG1248S-FR	Aluminium	10 Years Colour Fast
Black Powder Coat	FMG1248BALU-FR	Aluminium	10 Years Colour Fast
White Powder Coat	FMG1248WALU-FR	Aluminium	10 Years Colour Fast
Polished Silver	FMG1248PS-FR	Aluminium	10 Years Colour Fast



Measurements

Distance Between Screw Holes	272mm
Letterplate Length	300mm
Letterplate Height	76mm
Frame Material	Aluminium
Cavity Hole Size	257mm x 39.75mm



All Stainless Steel Letterplates

Finishes	Standard	Heavy Duty	Flap Material Construction	Coating Guarantee
PVD Gold	FMSS1248PVDG-NANOCOAST	FMSS1248PVDG-HD-NANOCOAST	304 Grade Stainless Steel	LIFETIME
Mirror Polished	FMSS1248MPSS-NANOCOAST	FMSS1248MPSS-HD-NANOCOAST	304 Grade Stainless Steel	LIFETIME
Satin Stainless	FMSS1248SSS-NANOCOAST	FMSS1248SSS-HD-NANOCOAST	304 Grade Stainless Steel	LIFETIME

Measurements

Distance Between Screw Holes	257mm
Letterplate Length	300mm
Letterplate Height	76mm
Frame Material	Stainless Steel
Cavity Hole Size	257mm x 39.75mm

