




SEALED TIGHT SOLUTIONS

# fire & smoke

## fire test data

All STS acoustic data is sourced, supplied and verified by independent, UKAS-accredited test facilities in accordance with all relevant British and European standards.

**Approved Document 'B' (Fire Safety)**  
**Approved Document 'M' (Access To and Use of Buildings)**  
**BS 9999**  
**BS 476: 22 - 1987**  
**BS 8214 - 2008**

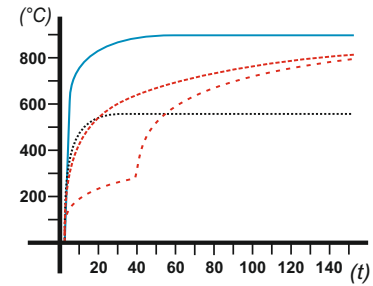

## STS 105GT Glazing tape - FD30/FD60 screens

For DOORS see STS data sheet :23

### Characteristics

Product code	Colour(s)	Size / Length	Features
STS 105GT	● BLACK	10mm x 5mm 100m/COIL	INTUMESCENT COMPRESSIBLE EASY FIT
STS 105GT-3 "COLOUR"	● BLACK ● BROWN ○ WHITE	10mm x 3mm 150m/COIL	COST-EFFECTIVE FULLY PROVEN FD30 & FD60* COMPLIANT

### Characteristics

Performance	Material	Fitting / installation
FIRE - See STS data sheets :	Closed-cell tape	Apply and trim to length


:24

## STS 302 LINER Glazing liner - FD60 screens


### Characteristics

Product code	Colour(s)	Size / Length	Features
STS 302 LINER	○ WHITE	30mm x 2mm 100m/COIL	INTUMESCENT EASY FIT COST-EFFECTIVE FULLY PROVEN

FD30 option - no liner

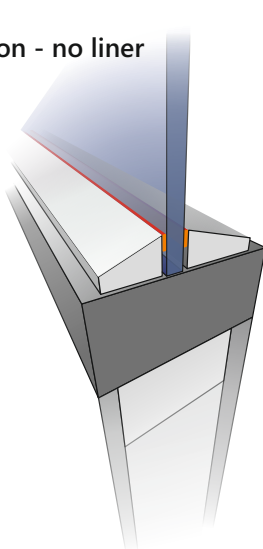

FD60 option - with liner

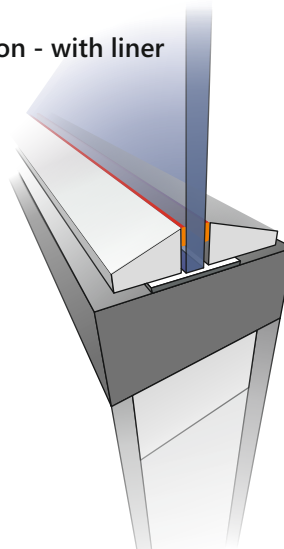

STS 105GT product shown orange/red for illustrative purposes only.