




SEALED TIGHT SOLUTIONS

# fire & smoke acoustic

## fire, smoke & acoustic test data

All STS acoustic data is sourced, supplied and verified by independent, UKAS-accredited test facilities in accordance with all relevant British and European standards.


BS 9999  
BS 476: 22 - 1987  
BS 8214 - 2008  
BS EN 1634 - 1: 2008




## STS 422 FITTING GUIDE

Procedure

Assumes pre-cut rebate of 20mm X 12mm

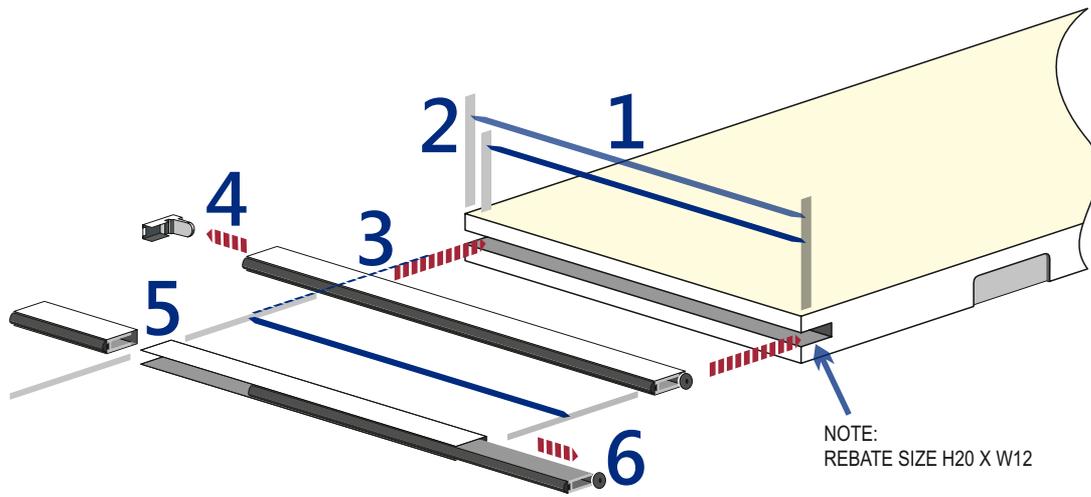

1. Measure width of door
2. Subtract 5mm from measurement 1
3. Transfer measurement to dropseal
4. Remove end-cap. (retain)
5. Cut
6. Slide out seal mechanism
7. Insert and screw carrier into rebate
8. Re-insert mechanism
9. Re-insert end-cap

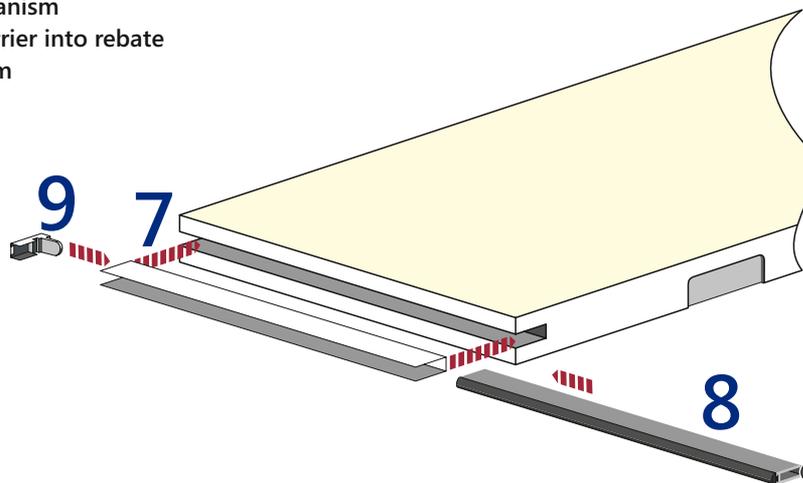

:XX

